
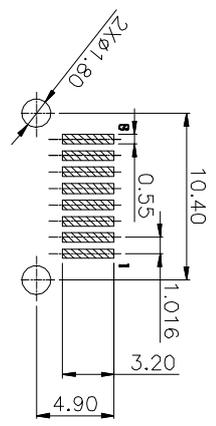
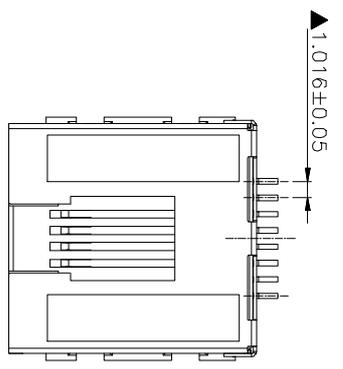
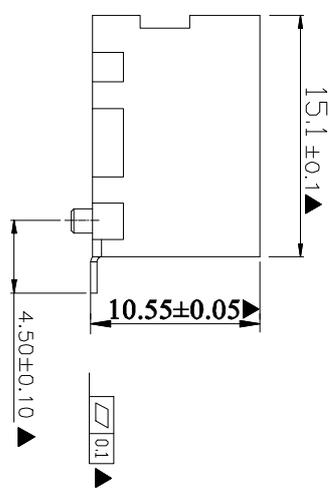


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 8P8C Connector SMT	MJ88-XX11-GRXXNS2

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	KELLY	2017.07.18

- SPECIFICATION
- VOLTAGE TARING: 125 VAC RMS.
  - CURRENT TATING: 1.5 AMP
  - CONTACT RESISTANCE: 50 mΩ MAX
  - INSULATION RESISTANCE: 500MΩ MIN.
  - WITHSTAND VOLTAGE: AC1000V RMS 50Hz or 60Hz MIN.
  - OPERATING TEMPERATURE: 0°C~+70°C

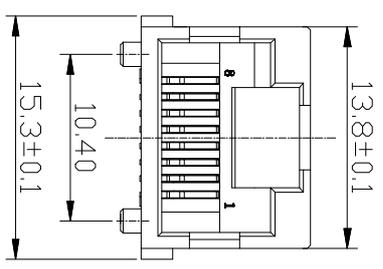

P.C.B孔位参考图±0.05

MJ88-XX11-GRXXNS2

Table 1

X	HOUSING COLOR
B	BLACK
Y	YELLOW
W	WHITE

Table 4

X	Shell Plating
G	Au GF Plating
N	Ni Plating

Table 2

X	Terminal Plating
0	Au GF Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating
X	Terminal Plating
A	Au GF Plating
B	Au 3u" Plating
C	Au 6u" Plating
D	Au 15u" Plating
E	Au 30u" Plating
F	Au 50u" Plating

Table 3

X	SHELL
C	Brass
S	Steel

b	SHELL	1	BRASS	NI PLATING 50u"	
b	TERMINAL	8	PHOSPHOR BRONZE	AU PLATING 15u"	
a	HOUSING	1	LCP UL94V-0	BLACK	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES	DECIMALS:	ANGLES:
	X : ±0.5	X : ±2°
	X.X : ±0.3	X.X : ±1°
	X.XX : ±0.2	

SCALE: 1/1 UNIT: mm

APPROVED BY: TONY

CHECKED BY: BILL

PREPARED BY: KELLY

CUSTOMER COPY

DWG. NO:

REV: A01

PAGE: 1 OF 1

Connector

东莞市合陵电子有限公司  
DongGuan Heling Electronic Co.,LTD